



# GOULDSPUMPS 24 HOUR QWIKSHIP PROGRAM







### MODEL LF 3196 LOW FLOW

1X1.5-4 1X2-10 1X1.5-8 1.5X3-13

MODEL CV 3196

NON-CLOG/SOLIDS HANDLING

STi / MTi Limited availability

## **MODEL 3196**

STi

1X1.5-6 1.5X3-6 2X3-6 1X1.5-8 1.5X3-8

MTi

3X4-7 2X3-8 3X4-8 3X4-8G 1X2-10 1.5X3-10 2X3-10 3X4-10 3X4-10H 4X6-10G 4X6-10H 1.5X3-13 2X3-13 3X4-13 4X6-13

XLTi

6X8-13 8X10-13 6X8-15

8X10-15

# MODEL 3796 SELF PRIMING

1.5X1.5-8 2X2-10

#### MOTORS

1 TO 100 HP / 1800RPM, 3600 RPM 230/460/3/60

**ALL PREMIUM EFFICIENCY MOTORS:** 

TEFC, CHEM DUTY, IEEE841.

### MATERIALS OF CONSTRUCTION

DUCTILE IRON / 316 STAINLESS STEEL / CD4MCu Availability varies depending on size & model.

#### COUPLINGS

WOOD TYPE SC

#### **BASEPLATES**

GOULDS CAST IRON / GOULDS CHEMBASE PLUS

#### **MECHANICAL SEALS**

CARTRIDGE TYPE
CARBON VS. SILICON CARBIDE
SILICON CARBIDE VS. SILICON CARBIDE


INVENTORY CHANGES DAILY, AVAILABILITY SUBJECT TO PRIOR SALE







# **GOULDSPUMPS 24 HOUR QWIKSHIP PROGRAM**

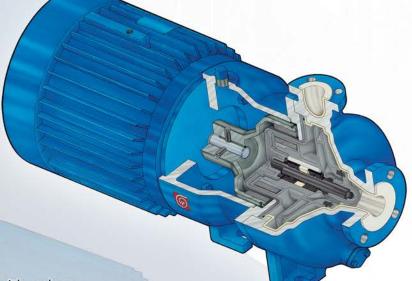

## AVAILABLE FROM TENCARVA STOCK!

Includes 3-Year, No Hassle Warranty\*



#### TEFZEL LINED CASINGS

and containment shells with carbon fiber filled TEFZEL impellers provide superior corrosion resistance and long life unequalled by alloy pumps.



THE 3298 DESIGN CONCEPT is simple, few parts and only one bolt size. Planned maintenance is fast and easier than other process pumps - sealed or sealless.

Tefzel lined Mag Drive pump with Viton or PFA O rings

Close-coupled with either fabricated steel base or Chembase Plus

Frame mounted with either cast iron base or Chembase Plus

Carbon, Silicon Carbide or Dry Guard bearings

Sizes: 1x1.5-5, 1x1.5-6, 1.5x2-6, 2x3-6, 1x1.5-8, 3x4-7, 1x2-10

Motors up to 30 hp

Premium efficiency chemical duty 460/3/60 TEFC Explosion motors available (slightly longer delivery time)